



Dryer fabric – standard spiral design

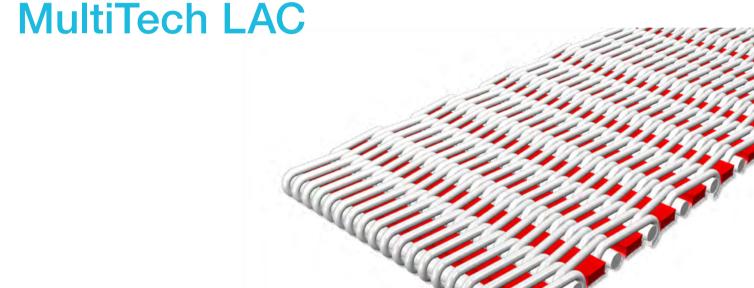

Your advantages

- + 0.70 mm diameter monofilament spirals for high wear resistance
- + The large volume of spiral material provides excellent resistance to surface wear and damage
- + Large open apertures
- + Excellent permeability retention improves drying rate
- + The LAC spiral structure provides a much stronger seam than is available from woven designs, for improved resistance to damage and cylinder wraps

Standard spiral design



Fabric life

- · High resistance to wear due to the large diameter monofilaments spirals
- · Spiral fabrics can be repaired to extend the life of the fabric

Drying efficiency

- · Improved heat transfer is given by the high contact area
- · Increased ventilation from a wide range of permeabilities up to 1000 cfm (16000 m³/m²/hr)


Seamless

· The seam is identical to the fabric body for nonmarking and integral strength

Smoother surface


· Polishing available for improved sheet contact

MultiTech LAC

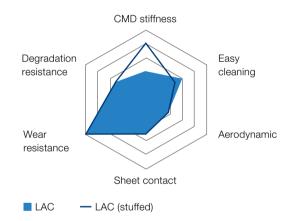


	Spiral monofilament	CMD hinge wires	Stuffer monofil
Material	PET	PET	PET
Colour	White	White	Flat red
Dimension	0.70 mm	0.90 mm	_

Sheet runnability & effective ventilation

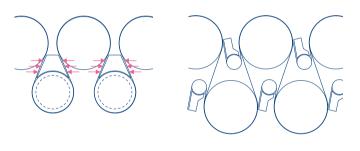

Resistance to wear

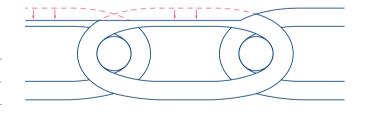

Voith Group St. Poeltener Str. 43 89522 Heidenheim Germany

Contact: Phone +49 7321 37-0 paper@voith.com









